

Decorator Standard Grade Switches

AC Quiet Switches
15A, 120/277V/AC



AC Quiet Switches

FEATURES

- Ultrasonic welding and integrated construction of the strap and body provide superior integrity.
- Backwire clamps on the side terminals provide for easy installation of #12 and #14 wire.
- Redesigned paddle for easier actuation and quiet operation.
- Thermoplastic rocker, top and backbody are virtually unbreakable, promising years of durable performance.
- Tri-combo screws accept slotted-, Phillips, and Robertson-head tools for installation flexibility.
- Long, broad mounting strap virtually eliminates floating installations.
- Patented built-in wire stripper for #12 and #14 wire to speed installation.
- Stippled ground screw terminal standard.
- 120/277V/AC rating ideal for fluorescent lighting fixtures typical in commercial applications.
- Push-in terminals accept #14 solid wire.
- Lighted switches glow in "off" position.
- Momentary contact switch operates only when finger pressure is applied; rated 1/2 HP @ 120V/AC for garbage disposals or loads requiring impulse current.
- 5 Year Limited Warranty.

Metal Strap – Back Wire, Side Wire and Push Wire

| Rating A | V/AC | Color | Single Pole | Catalog No. | |
|-------------|---------|--------------|-------------|-------------|---------|
| | | | | 3-Way | 4-Way |
| 15 | 120/277 | Almond | 7501A | 7503A | 7504A* |
| | | Black | 7501BK | 7503BK | 7504BK* |
| | | Brown | 7501B | 7503B | 7504B* |
| | | Gray | 7501GY | 7503GY | 7504GY* |
| | | Ivory | 7501V | 7503V | 7504V* |
| | | Light Almond | 7501LA | 7503LA | 7504LA* |
| | | White | 7501W | 7503W | 7504W* |

* Fed. Spec.

Lighted – Metal Strap – Back Wire, Side Wire and Push Wire



| Rating A | V/AC | Color | Single Pole | Catalog No. | |
|-------------|---------|--------------|-------------|-------------|---------|
| | | | | 3-Way | 4-Way |
| 15 | 120/277 | Almond | 7511A | 7513A | — |
| | | Ivory | 7511V | 7513V | 7514V* |
| | | Light Almond | 7511LA | 7513LA | 7514LA* |
| | | White | 7511W | 7513W | 7514W* |

* Fed. Spec.

Momentary Contact – Metal Strap – Back Wire, Side Wire and Push Wire

| Rating A | V/AC | Color | Catalog No. Single Pole |
|-------------|------|--------------|----------------------------|
| 15 | 120 | Almond | 7521A† |
| | | Ivory | 7521V† |
| | | Light Almond | 7521LA† |
| | | White | 7521W† |

†NOM certified

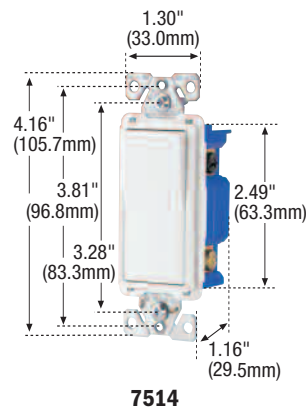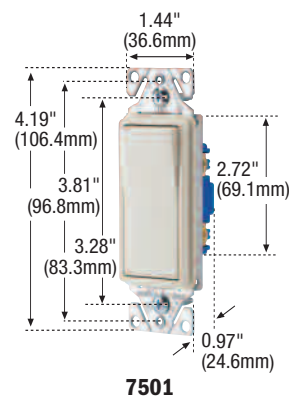

B-3 Decorator Devices

TESTING & CODE COMPLIANCE

- UL and cUL Listed, meets all UL 20 requirements, (file no. E18704).
- UL verified to Federal Specification WS-896-E (7504, 7514).

MATERIAL CHARACTERISTICS

Meets flammability requirements per UL 94, V0 rated. Temperature Rating: -20°C to 60°C.